
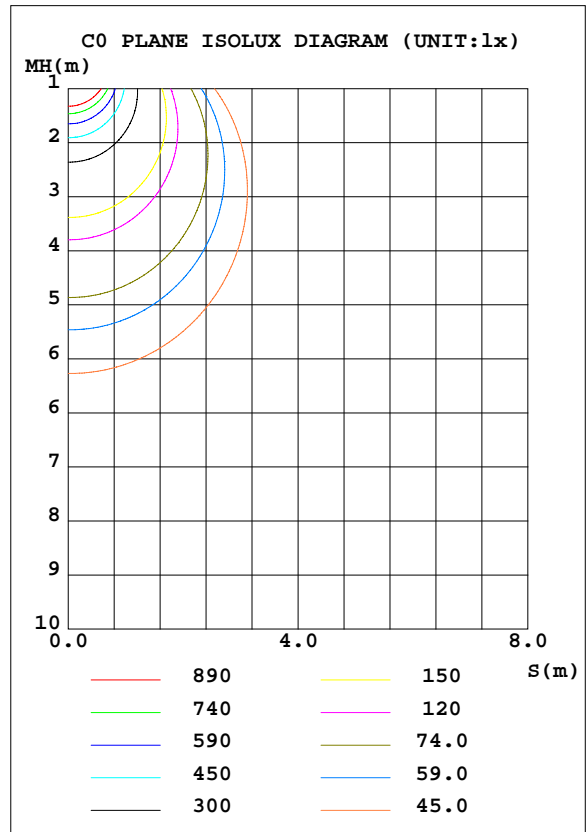


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.3V I:0.2760A P:60.30W PF:0.9900 Lamp Flux:6560.4x1 lm		
NAME:(B)Waterproof led strip lamps 1500mm 60W	TYPE:	WEIGHT:
SPEC.: AC-LL150-60W-B-IP65	DIM.:	SERIAL No.:
MFR.:	SUR.:117.5cm*13.5cm	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 108.80 lm/W			
MODEL		I _{max} (cd)	1484	S/MH(C0/180)	1.35
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	1.27
RATED VOLTAGE(V)		TOTAL FLUX(lm)	6560.4	η UP, DN(C0-180)	8.2, 41.6
NOMINAL FLUX(lm)	6560.4	CIE CLASS	SEMI-D.	η UP, DN(C180-360)	8.2, 42.0
LAMPS INSIDE	1	η up(%)	16.4	CIBSE SHR NOM	1.50
TEST VOLTAGE(V)		η down(%)	83.6	CIBSE SHR MAX	1.55

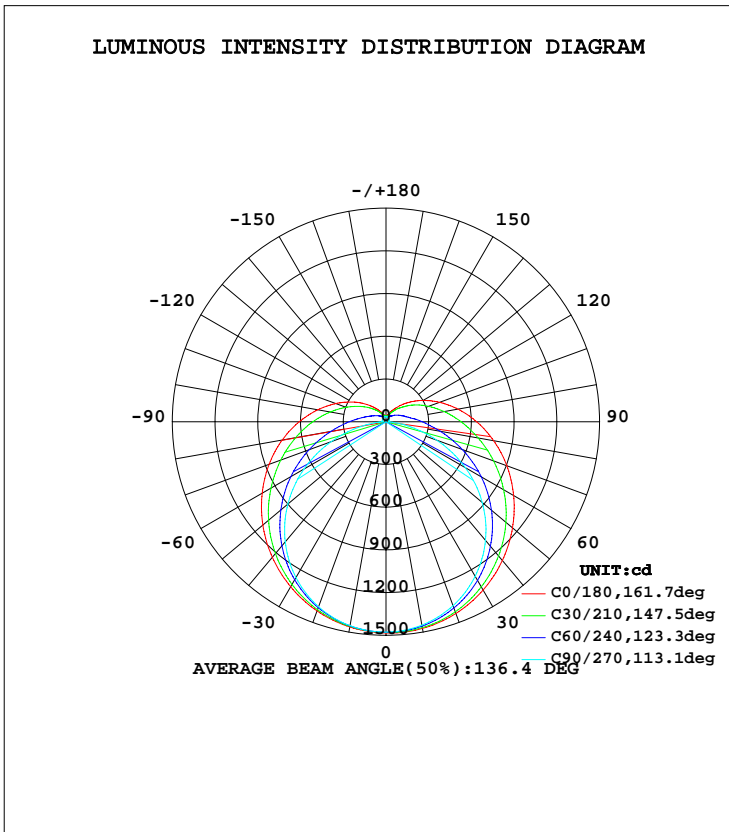

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:andliy
 Test Date:2014-12-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.287
 Humidity:65.0%
 Test Distance:8.660m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	Φlum,lamp
10	1474	1463	1451	1455	1464	1457	1454	1467	0- 10	140.4	140.4	2.14,2.14
20	1433	1407	1375	1391	1414	1397	1383	1414	10- 20	405.8	546.1	8.32,8.32
30	1364	1312	1253	1290	1339	1301	1264	1323	20- 30	626.7	1173	17.9,17.9
40	1272	1185	1087	1159	1242	1173	1101	1199	30- 40	780.1	1953	29.8,29.8
50	1160	1033	882.5	1005	1129	1020	899.7	1049	40- 50	852.3	2805	42.8,42.8
60	1035	863.2	642.8	836.2	1004	851.9	665.0	881.4	50- 60	840.5	3646	55.6,55.6
70	902.8	687.4	381.3	662.9	873.3	680.1	409.4	708.7	60- 70	754.0	4400	67.1,67.1
80	767.7	521.7	135.2	502.7	739.7	518.3	162.9	544.8	70- 80	615.9	5016	76.5,76.5
90	637.0	391.7	18.32	375.5	609.4	386.6	19.40	411.4	80- 90	466.7	5482	83.6,83.6
100	513.9	292.2	20.87	276.7	486.8	284.2	25.97	307.8	90-100	352.3	5835	88.9,88.9
110	400.5	221.4	23.46	203.1	375.1	208.0	27.88	229.2	100-110	259.7	6094	92.9,92.9
120	300.5	165.5	26.08	147.9	278.4	151.7	29.01	168.6	110-120	183.6	6278	95.7,95.7
130	214.8	117.8	28.26	106.6	197.1	109.5	29.21	122.2	120-130	122.4	6400	97.6,97.6
140	144.4	83.81	30.43	76.80	132.3	78.97	29.30	82.16	130-140	75.98	6476	98.7,98.7
150	93.94	59.40	32.18	57.03	86.54	57.99	31.43	58.55	140-150	44.08	6520	99.4,99.4
160	62.27	45.17	34.19	44.84	58.08	45.57	35.81	44.73	150-160	24.13	6545	99.8,99.8
170	45.58	39.25	36.27	39.09	43.05	39.49	37.04	39.71	160-170	12.09	6557	99.9,99.9
180	38.80	37.32	36.59	37.20	38.74	37.33	36.62	37.22	170-180	3.703	6560	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:andliy
 Test Date:2014-12-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.287
 Humidity:65.0%
 Test Distance:8.660m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.3V I:0.2760A P:60.30W PF:0.9900 Lamp Flux:6560.4x1 lm		
NAME:(B)Waterproof led strip lamps 1500mm 60W	TYPE:	WEIGHT:
SPEC.: AC-LL150-60W-B-IP65	DIM.:	SERIAL No.:
MFR.:	SUR.:117.5cm*13.5cm	PROTECTION ANGLE:

pcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pw																
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.15	1.15	1.15	1.11	1.11	1.11	1.02	1.02	1.02	.94	.94	.94	.87	.87	.87	.84
1.0	.96	.91	.86	.92	.88	.83	.85	.81	.78	.78	.75	.72	.72	.70	.67	.64
2.0	.82	.75	.68	.79	.72	.66	.73	.67	.62	.67	.62	.58	.62	.58	.54	.51
3.0	.71	.62	.55	.69	.60	.54	.63	.56	.51	.58	.53	.48	.54	.49	.45	.42
4.0	.63	.53	.46	.60	.52	.45	.56	.48	.43	.51	.45	.40	.47	.42	.38	.35
5.0	.56	.46	.39	.54	.45	.38	.50	.42	.36	.46	.39	.34	.42	.37	.33	.30
6.0	.50	.41	.34	.48	.39	.33	.45	.37	.31	.41	.35	.30	.38	.33	.28	.26
7.0	.45	.36	.30	.43	.35	.29	.40	.33	.28	.37	.31	.26	.35	.29	.25	.23
8.0	.41	.32	.26	.40	.31	.26	.37	.30	.24	.34	.28	.23	.32	.26	.22	.20
9.0	.37	.29	.23	.36	.28	.23	.34	.27	.22	.32	.25	.21	.29	.24	.20	.18
10.0	.34	.26	.21	.33	.26	.21	.31	.24	.20	.29	.23	.19	.27	.22	.18	.16

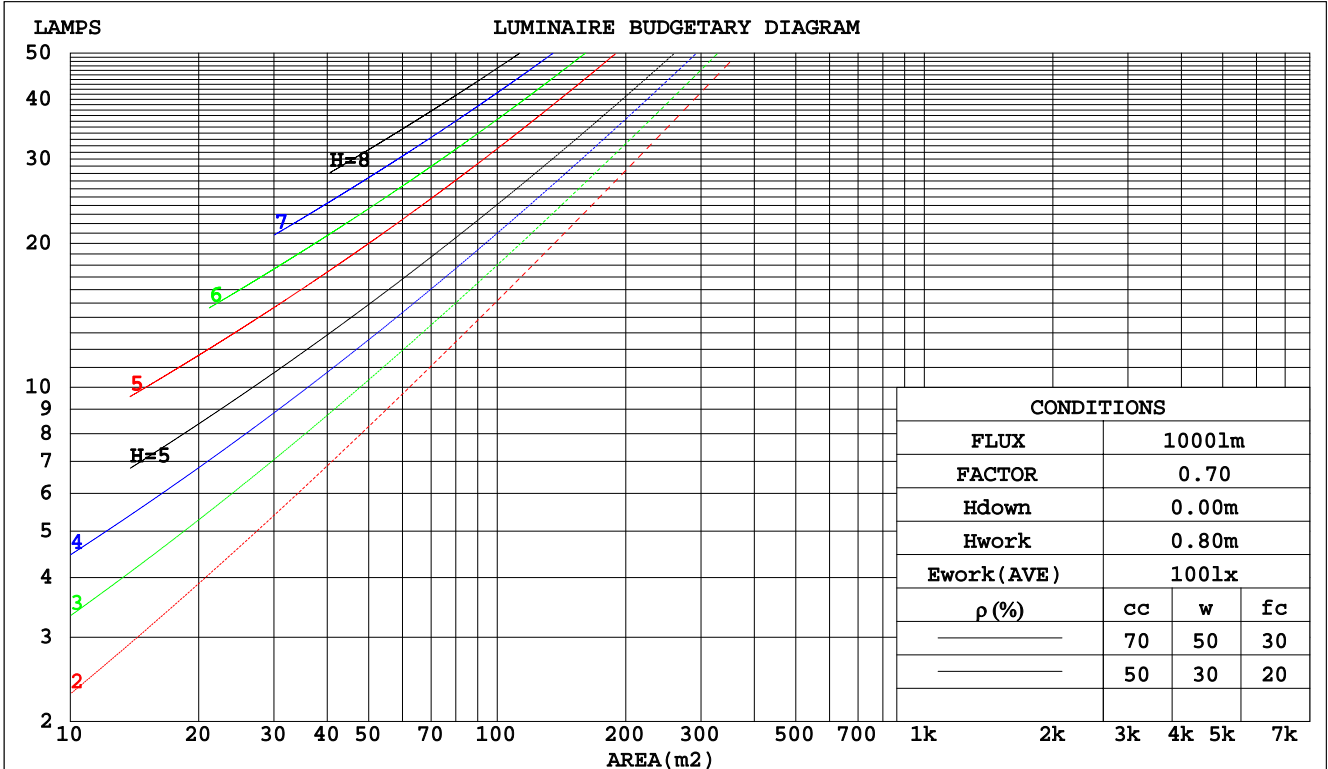

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:andliy
 Test Date:2014-12-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.287
 Humidity:65.0%
 Test Distance:8.660m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:220.3V I:0.2760A P:60.30W PF:0.9900 Lamp Flux:6560.4x1 lm		
NAME:(B)Waterproof led strip lamps 1500mm 60W	TYPE:	WEIGHT:
SPEC.: AC-LL150-60W-B-IP65	DIM.:	SERIAL No.:
MFR.:	SUR.:117.5cm*13.5cm	PROTECTION ANGLE:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.381	.217	.069	.369	.210	.067	.346	.198	.063	.325	.187	.060	.305	.177	.057	
2.0	.331	.181	.056	.320	.176	.054	.299	.167	.052	.280	.157	.049	.263	.149	.047	
3.0	.295	.157	.047	.285	.153	.046	.266	.144	.044	.249	.136	.042	.233	.129	.040	
4.0	.266	.138	.041	.257	.134	.040	.240	.127	.038	.224	.120	.036	.210	.114	.035	
5.0	.242	.123	.036	.234	.120	.035	.218	.114	.033	.204	.108	.032	.191	.102	.031	
6.0	.222	.111	.032	.214	.108	.031	.200	.103	.030	.187	.097	.029	.175	.092	.027	
7.0	.205	.101	.029	.198	.099	.028	.185	.094	.027	.173	.089	.026	.162	.084	.025	
8.0	.190	.093	.026	.184	.090	.026	.172	.086	.025	.161	.082	.024	.151	.077	.023	
9.0	.177	.086	.024	.171	.084	.023	.161	.079	.023	.150	.075	.022	.141	.072	.021	
10.0	.166	.079	.022	.160	.078	.022	.151	.074	.021	.141	.070	.020	.132	.067	.019	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.316	.316	.316	.270	.270	.270	.184	.184	.184	.106	.106	.106	.034	.034	.034	
1.0	.311	.282	.255	.266	.242	.219	.182	.166	.152	.105	.096	.088	.034	.031	.029	
2.0	.305	.259	.220	.261	.223	.190	.179	.154	.133	.103	.090	.078	.033	.029	.025	
3.0	.297	.242	.199	.255	.209	.172	.175	.145	.121	.101	.085	.071	.032	.028	.023	
4.0	.289	.230	.184	.248	.198	.160	.171	.138	.113	.099	.081	.067	.032	.026	.022	
5.0	.282	.220	.174	.242	.190	.152	.167	.133	.107	.097	.078	.063	.031	.025	.021	
6.0	.274	.212	.167	.236	.183	.146	.163	.128	.103	.094	.076	.061	.030	.025	.020	
7.0	.267	.205	.162	.230	.178	.141	.159	.125	.100	.092	.073	.059	.030	.024	.020	
8.0	.260	.200	.158	.224	.173	.138	.155	.122	.098	.090	.072	.058	.029	.024	.019	
9.0	.254	.195	.155	.219	.169	.135	.152	.119	.096	.088	.070	.057	.029	.023	.019	
10.0	.248	.191	.152	.214	.166	.133	.148	.117	.094	.087	.069	.056	.028	.023	.019	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:andliy
 Test Date:2014-12-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.287
 Humidity:65.0%
 Test Distance:8.660m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.3V I:0.2760A P:60.30W PF:0.9900 Lamp Flux:6560.4x1 lm										
NAME:(B)Waterproof led strip lamps 1500mm 60W					TYPE:			WEIGHT:		
SPEC.: AC-LL150-60W-B-IP65					DIM.:			SERIAL No.:		
MFR.:					SUR.:117.5cm*13.5cm			PROTECTION ANGLE:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	20.9	22.3	21.4	22.8	23.3	19.1	20.4	19.5	20.9	21.5
3H	23.5	24.8	24.0	25.3	25.9	20.5	21.8	21.1	22.3	22.9
4H	25.0	26.2	25.5	26.7	27.3	21.1	22.3	21.7	22.9	23.5
6H	26.6	27.7	27.1	28.3	28.9	21.5	22.6	22.1	23.2	23.8
8H	27.5	28.6	28.0	29.1	29.8	21.6	22.7	22.2	23.3	23.9
12H	28.5	29.6	29.1	30.1	30.8	21.6	22.7	22.2	23.3	23.9
4H 2H	21.4	22.7	22.0	23.2	23.8	20.1	21.3	20.6	21.9	22.5
3H	24.3	25.4	24.9	26.0	26.6	21.9	22.9	22.4	23.5	24.2
4H	26.0	26.9	26.6	27.5	28.2	22.6	23.6	23.2	24.2	24.9
6H	27.8	28.7	28.4	29.3	30.0	23.2	24.1	23.9	24.7	25.4
8H	28.8	29.6	29.4	30.3	31.0	23.4	24.2	24.1	24.9	25.6
12H	30.0	30.7	30.6	31.4	32.1	23.5	24.3	24.2	24.9	25.7
8H 4H	26.3	27.1	26.9	27.7	28.5	23.6	24.4	24.3	25.1	25.8
6H	28.4	29.1	29.1	29.8	30.5	24.6	25.3	25.2	25.9	26.7
8H	29.6	30.3	30.3	31.0	31.7	25.0	25.6	25.7	26.3	27.1
12H	31.1	31.6	31.8	32.3	33.1	25.3	25.8	26.0	26.5	27.4
12H 4H	26.3	27.1	27.0	27.7	28.5	23.9	24.7	24.6	25.4	26.1
6H	28.5	29.1	29.2	29.8	30.6	25.1	25.7	25.8	26.4	27.2
8H	29.9	30.4	30.6	31.1	31.9	25.7	26.2	26.4	26.9	27.8
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.1				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.4				

CIE Pub.117 Corrected 6560 lm Total Lamp Luminous Flux.(8log(F/F0) = 6.5)

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:andliy
 Test Date:2014-12-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.287
 Humidity:65.0%
 Test Distance:8.660m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.3V I:0.2760A P:60.30W PF:0.9900 Lamp Flux:6560.4x1 lm		
NAME:(B)Waterproof led strip lamps 1500mm 60W	TYPE:	WEIGHT:
SPEC.: AC-LL150-60W-B-IP65	DIM.:	SERIAL No.:
MFR.:	SUR.:117.5cm*13.5cm	PROTECTION ANGLE:

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	48	36	29	47	36	29	46	35	28	21
0.80	58	45	37	56	44	36	53	43	36	28
1.00	65	53	44	64	52	44	60	52	43	34
1.25	72	60	51	70	59	51	66	56	49	40
1.50	77	65	57	75	64	56	70	61	54	44
2.00	85	74	66	82	72	64	76	68	62	50
2.50	89	79	71	86	77	70	80	72	66	54
3.00	93	84	76	89	81	74	83	76	71	58
4.00	98	90	83	94	87	81	87	81	76	62
5.00	101	94	88	97	91	85	89	84	80	66
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:andliy
 Test Date:2014-12-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.287
 Humidity:65.0%
 Test Distance:8.660m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.3V I:0.2760A P:60.30W PF:0.9900 Lamp Flux:6560.4x1 lm		
NAME:(B)Waterproof led strip lamps 1500mm 60W	TYPE:	WEIGHT:
SPEC.: AC-LL150-60W-B-IP65	DIM.:	SERIAL No.:
MFR.:	SUR.:117.5cm*13.5cm	PROTECTION ANGLE:

Conical surface Flux(90deg):

2375.4 lm

%lum = 36.2%


%lamp = 36.2%

Conical surface Flux(70deg):

3645.8 lm

%lum = 55.6%

%lamp = 55.6%

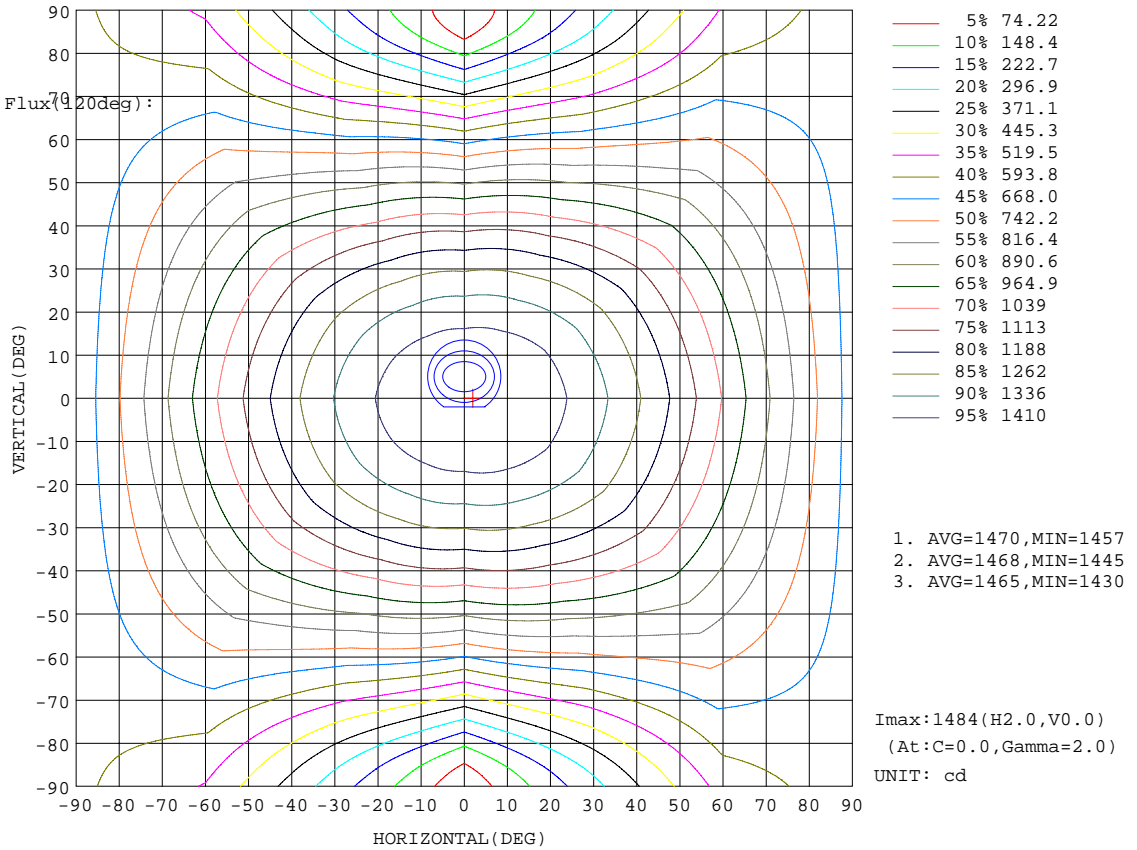


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:andliy
Test Date:2014-12-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.287
Humidity:65.0%
Test Distance:8.660m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.3V I:0.2760A P:60.30W PF:0.9900 Lamp Flux:6560.4x1 lm		
NAME:(B)Waterproof led strip lamps 1500mm 60W	TYPE:	WEIGHT:
SPEC.: AC-LL150-60W-B-IP65	DIM.:	SERIAL No.:
MFR.:	SUR.:117.5cm*13.5cm	PROTECTION ANGLE:

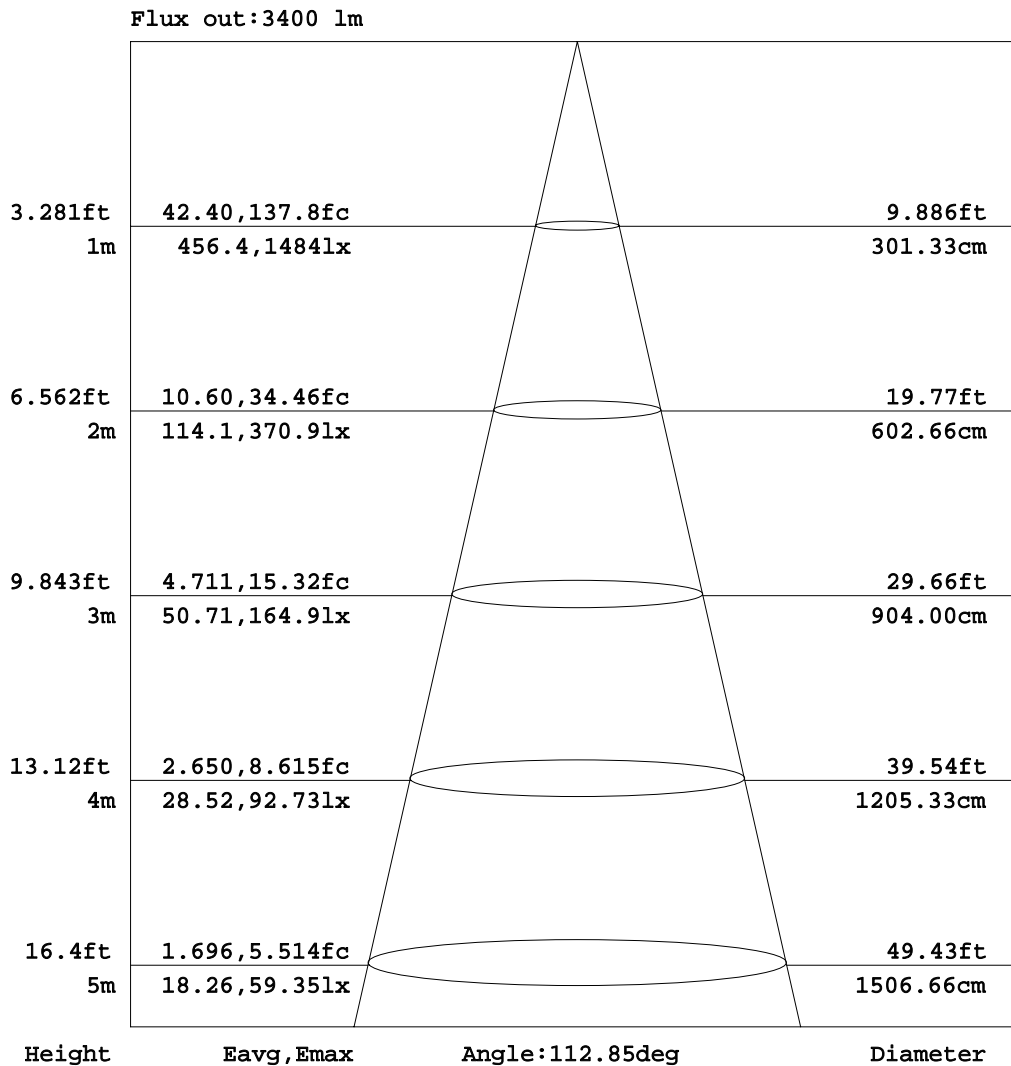


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:andliy
 Test Date:2014-12-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.287
 Humidity:65.0%
 Test Distance:8.660m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM


Test:U:220.3V I:0.2760A P:60.30W PF:0.9900 Lamp Flux:6560.4x1 lm		
NAME:(B)Waterproof led strip lamps 1500mm 60W	TYPE:	WEIGHT:
SPEC.: AC-LL150-60W-B-IP65	DIM.:	SERIAL No.:
MFR.:	SUR.:117.5cm*13.5cm	PROTECTION ANGLE:

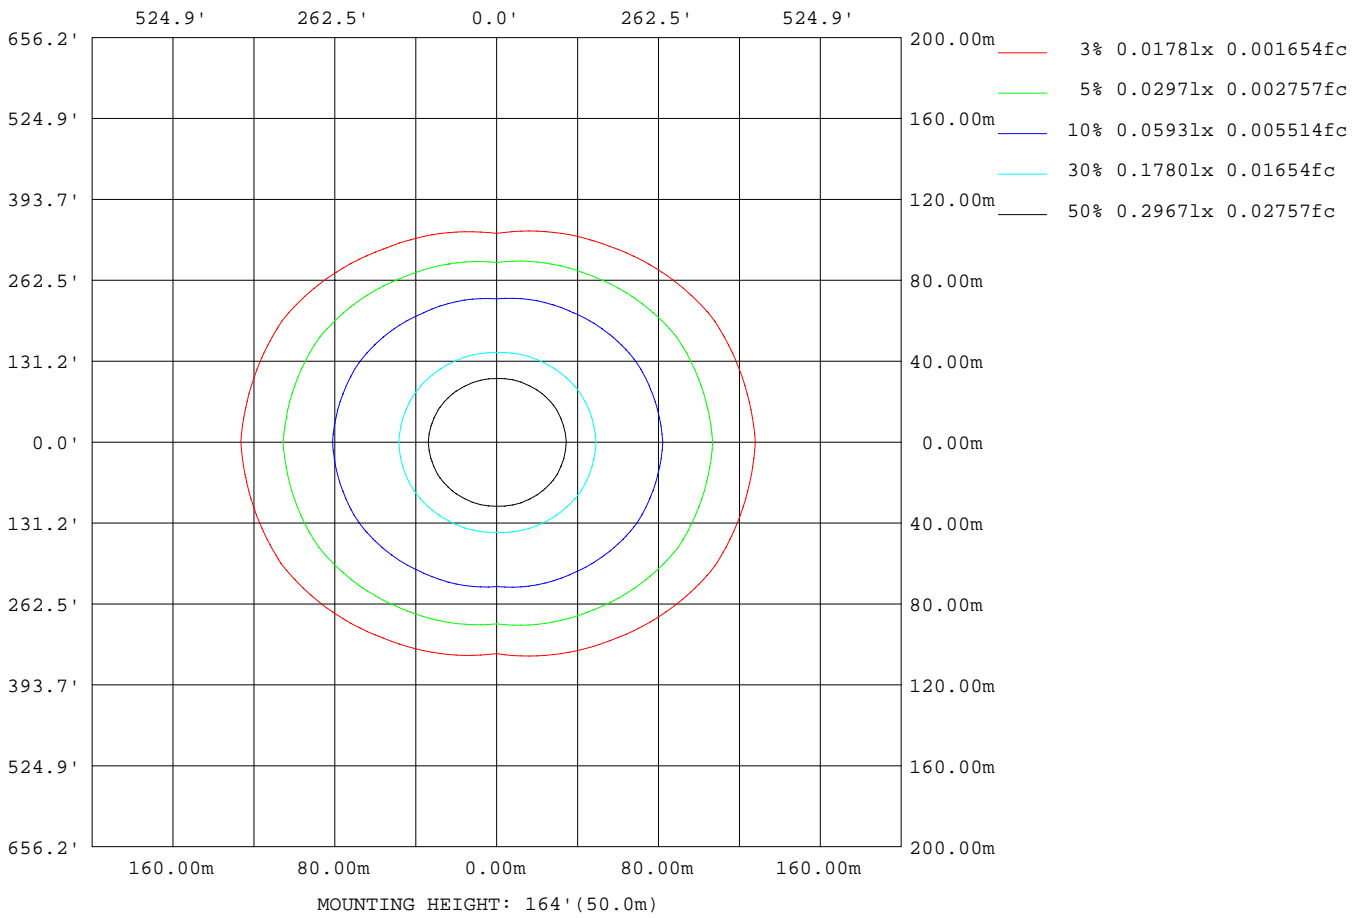

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:andliy
 Test Date:2014-12-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.287
 Humidity:65.0%
 Test Distance:8.660m [K=1.0000]
 Remarks:

Planar Illuminance Curve

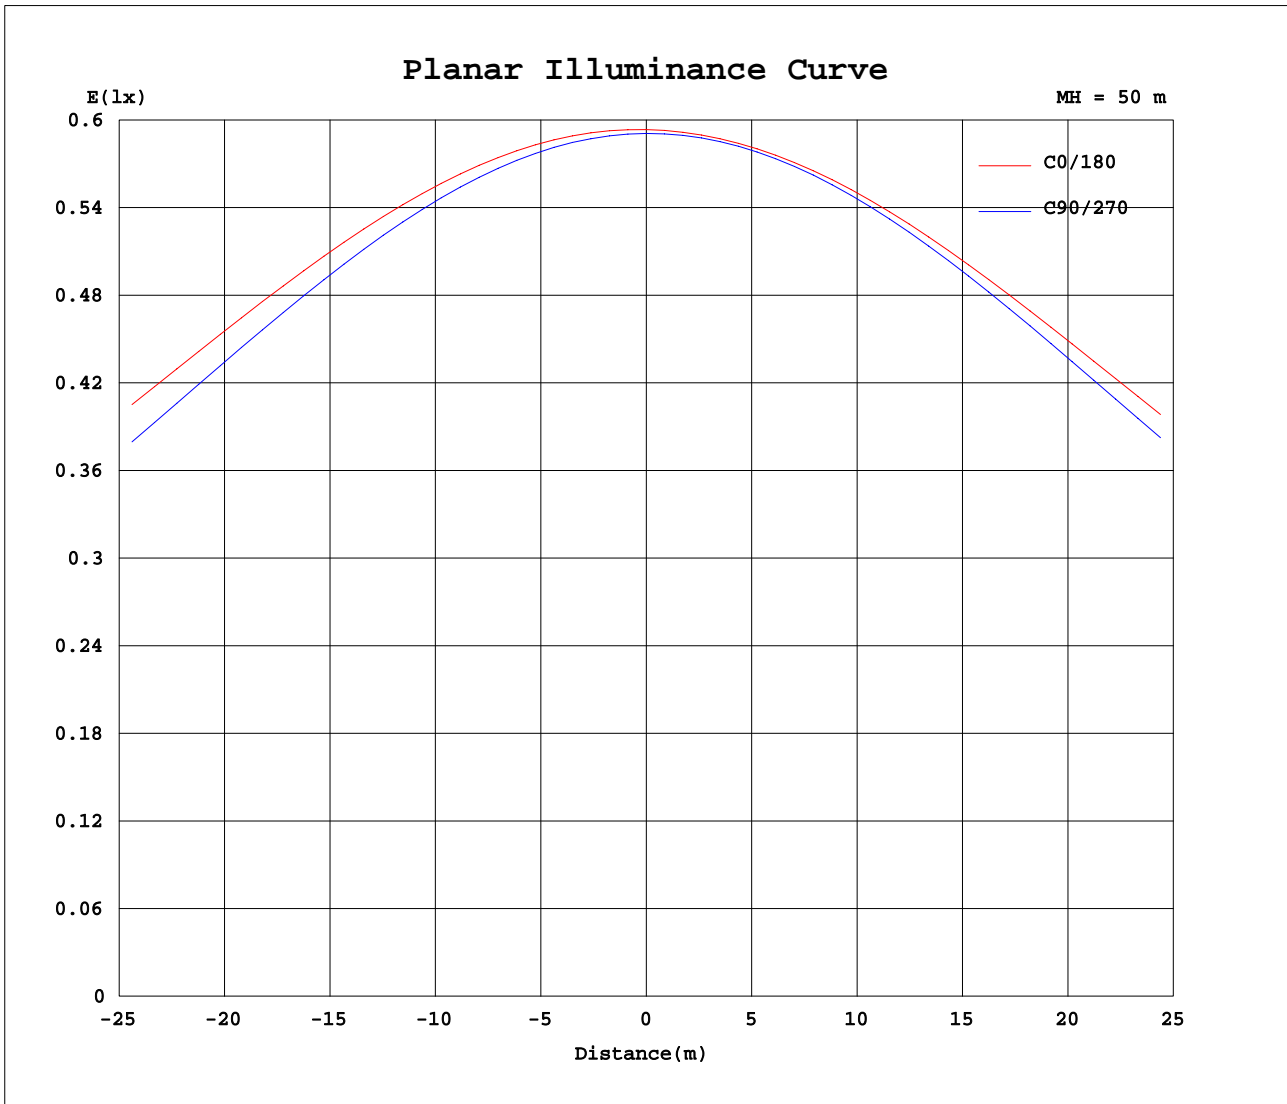

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: andliy
 Test Date: 2014-12-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.287
 Humidity: 65.0%
 Test Distance: 8.660m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.3V I:0.2760A P:60.30W PF:0.9900 Lamp Flux:6560.4x1 lm		
NAME:(B)Waterproof led strip lamps 1500mm 60W	TYPE:	WEIGHT:
SPEC.: AC-LL150-60W-B-IP65	DIM.:	SERIAL No.:
MFR.:	SUR.:117.5cm*13.5cm	PROTECTION ANGLE:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	1484	1480	1478	1477	1480	1482	1484	1480	1478	1477	1480	1482						
5	1483	1478	1473	1470	1471	1474	1477	1474	1472	1472	1477	1481						
10	1474	1468	1457	1451	1452	1458	1464	1459	1455	1454	1463	1472						
15	1457	1449	1430	1419	1422	1433	1442	1436	1428	1425	1438	1454						
20	1433	1421	1392	1375	1381	1400	1414	1405	1390	1383	1402	1426						
25	1402	1384	1344	1320	1330	1359	1379	1366	1341	1329	1356	1391						
30	1364	1339	1286	1253	1269	1311	1339	1320	1282	1264	1299	1348						
35	1321	1287	1218	1175	1200	1257	1293	1267	1214	1188	1233	1297						
40	1272	1230	1141	1087	1121	1197	1242	1208	1137	1101	1158	1241						
45	1218	1167	1057	990	1036	1134	1187	1144	1054	1005	1075	1179						
50	1160	1099	967	882	945	1066	1129	1077	964	900	986	1112						
55	1099	1028	871	767	849	996	1067	1005	869	786	892	1042						
60	1035	954	772	643	749	923	1004	932	771	665	794	969						
65	969	879	671	514	648	850	939	859	673	539	695	896						
70	903	805	570	381	548	778	873	786	574	409	595	822						
75	836	730	475	253	454	706	807	714	480	281	499	750						
80	768	657	386	135	370	636	740	644	393	163	411	679						
85	701	589	311	47.2	300	569	674	577	317	69.2	333	612						
90	637	528	255	18.3	244	507	609	514	259	19.4	274	549						
95	575	470	211	19.7	198	448	547	454	210	21.7	225	487						
100	514	415	169	20.9	161	392	487	398	171	26.0	186	430						
105	456	365	143	22.1	133	341	429	346	140	27.0	155	376						
110	400	319	124	23.5	112	294	375	298	118	27.9	132	326						
115	349	276	108	24.8	95.6	252	325	255	100	29.1	114	281						
120	301	238	93.0	26.1	82.0	214	278	217	86.3	29.0	96.9	240						
125	256	200	80.7	27.2	71.4	180	236	183	75.1	30.6	82.7	204						
130	215	166	69.7	28.3	62.9	150	197	153	65.7	29.2	72.6	172						
135	178	139	59.2	29.4	56.0	125	162	128	57.7	28.4	62.8	142						
140	144	115	52.8	30.4	50.3	103	132	106	52.3	29.3	51.7	113						
145	116	90.6	47.5	31.3	46.5	85.7	108	86.9	48.2	30.3	45.9	94.5						
150	93.9	75.2	43.6	32.2	43.2	70.9	86.5	71.6	44.4	31.4	41.6	75.5						
155	76.0	60.4	40.8	33.3	40.8	59.4	70.0	60.5	41.1	35.3	39.0	59.1						
160	62.3	50.5	39.9	34.2	39.3	50.4	58.1	51.6	39.5	35.8	40.5	48.9						
165	52.2	43.7	39.2	35.2	38.2	44.2	49.0	44.8	38.6	36.5	39.6	43.1						
170	45.6	40.8	37.7	36.3	37.6	40.6	43.0	41.0	38.0	37.0	38.9	40.5						
175	40.6	38.8	37.8	36.7	37.0	38.3	39.6	38.5	37.2	37.0	38.0	39.1						
180	38.8	37.7	36.9	36.6	36.9	37.5	38.7	37.7	37.0	36.6	36.9	37.6						

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:andliy
 Test Date:2014-12-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.287
 Humidity:65.0%
 Test Distance:8.660m [K=1.0000]
 Remarks: