



AC LIGHTING TECHNOLOGY LIMITED



Tri-proof IP65 LED Line Lamps



Replacement





1. 2835 SMD LEDs, Epistar LED chip, high brightness, lower light decay, safety working current to ensure long life span of LED. LM-80certified.
2. Driver is specially for LED lights, AC / DC power supply, high power factor, suitable for global AC voltage. Products with overload protection, output short circuit protection, output overvoltage protection. Products with elegant appearance, smart and small size, high efficiency and low noise Primary and secondary driver are isolated, high isolation voltage to ensure safety use.
3. 6063 aerospace aluminum, thermal performance, small, wear-resisting property, more energy efficient.
4. Waterproof, Explosion-proof, Dust-proof.

AC-LL60-30W-A

Description:

Model No.	AC-LL60-30W-A
Actual Size	600x90x74mm
LED Source	192PCS SMD LED 2835
Power	30W
Color Temp	Warm White: 2800-3500K Neutral White: 4000-4500K Daylight White: 5000-5500K Pure White: 6000-6500K Cool White: 6500-7000K
Luminous (lm)	3000 ± 10%LM
Lighting effect	>100LM/W
CRI	80-85Ra
P.F	>0.95
Input Voltage	AC85-265V 50/60Hz
Output Voltage	DC30-40V
Work Temp	-20~80°C
Main Material	Aluminum housing , PC cover
Frame color	White, sliver
Lifespan	More than 35000H
Warranty	3Years
Certification	ROHS、CE、FCC



AC-LL90-40W-A

Description:

Model No.	AC-LL90-40W-A
Actual Size	900x90x74mm
LED Source	240PCS SMD LED 2835
Power	40W
Color Temp	Warm White: 2800-3500K Neutral White: 4000-4500K Daylight White: 5000-5500K Pure White: 6000-6500K Cool White: 6500-7000K
Luminous (lm)	4000 ± 10%LM
Lighting effect	>100LM/W
CRI	80-85Ra
P.F	>0.95
Input Voltage	AC85-265V 50/60Hz
Output Voltage	DC30-40V
Work Temp	-20~80°C
Main Material	Aluminum housing , PC cover
Frame color	White, sliver
Lifespan	More than 35000H
Warranty	3Years
Certification	ROHS、CE、FCC





AC-LL120-50W-A

Description:

Model No.	AC-LL120-50W-A
Actual Size	1200x90x74mm
LED Source	288PCS SMD LED 2835
Power	50W
Color Temp	Warm White: 2800-3500K Neutral White: 4000-4500K Daylight White: 5000-5500K Pure White: 6000-6500K Cool White: 6500-7000K
Luminous (lm)	5000 ± 10%LM
Lighting effect	>100LM/W
CRI	80-85Ra
P.F	>0.95
Input Voltage	AC85-265V 50/60Hz
Output Voltage	DC30-40V
Work Temp	-20~80°C
Main Material	Aluminum housing , PC cover
Frame color	White, sliver
Lifespan	More than 35000H
Warranty	3Years
Certification	ROHS、CE、FCC



AC-LL120-60W-A

Description:

Model No.	AC-LL120-60W-A
Actual Size	1200x90x74mm
LED Source	336PCS SMD LED 2835
Power	60W
Color Temp	Warm White: 2800-3500K Neutral White: 4000-4500K Daylight White: 5000-5500K Pure White: 6000-6500K Cool White: 6500-7000K
Luminous (lm)	6000 ± 10%LM
Lighting effect	>100LM/W
CRI	80-85Ra
P.F	>0.95
Input Voltage	AC85-265V 50/60Hz
Output Voltage	DC30-40V
Work Temp	-20~80°C
Main Material	Aluminum housing , PC cover
Frame color	White, sliver
Lifespan	More than 35000H
Warranty	3Years
Certification	ROHS、CE、FCC





AC-LL150-60W-A

Description:

Model No.	AC-LL150-60W-A
Actual Size	1500x90x74mm
LED Source	336PCS SMD LED 2835
Power	60W
Color Temp	Warm White: 2800-3500K Neutral White: 4000-4500K Daylight White: 5000-5500K Pure White: 6000-6500K Cool White: 6500-7000K
Luminous (lm)	6000 ± 10%LM
Lighting effect	>100LM/W
CRI	80-85Ra
P.F	>0.95
Input Voltage	AC85-265V 50/60Hz
Output Voltage	DC30-40V
Work Temp	-20~80°C
Main Material	Aluminum housing , PC cover
Frame color	White, sliver
Lifespan	More than 35000H
Warranty	3Years
Certification	ROHS、CE、FCC



AC-LL150-80W-A

Description:

Model No.	AC-LL150-80W-A
Actual Size	1500x90x74mm
LED Source	432PCS SMD LED 2835
Power	80W
Color Temp	Warm White: 2800-3500K Neutral White: 4000-4500K Daylight White: 5000-5500K Pure White: 6000-6500K Cool White: 6500-7000K
Luminous (lm)	8000 ± 10%LM
Lighting effect	>100LM/W
CRI	80-85Ra
P.F	>0.95
Input Voltage	AC85-265V 50/60Hz
Output Voltage	DC30-40V
Work Temp	-20~80°C
Main Material	Aluminum housing , PC cover
Frame color	White, sliver
Lifespan	More than 35000H
Warranty	3Years
Certification	ROHS、CE、FCC






AC LIGHTING TECHNOLOGY LIMITED




Tri-proof IP65 LED
Line Lamps


Size:

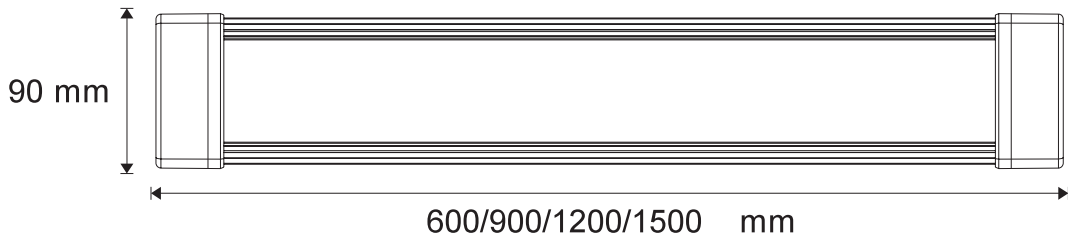


Front

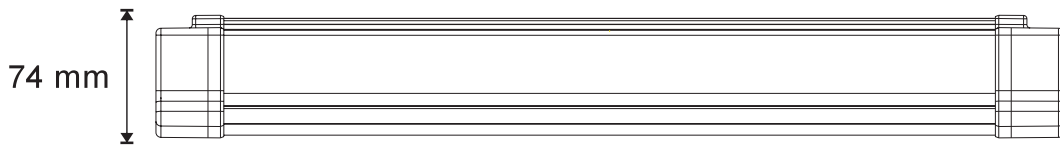

Back

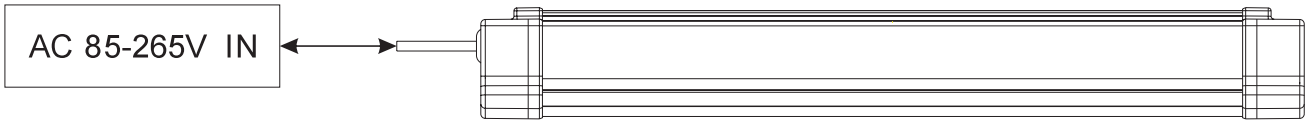

Package:

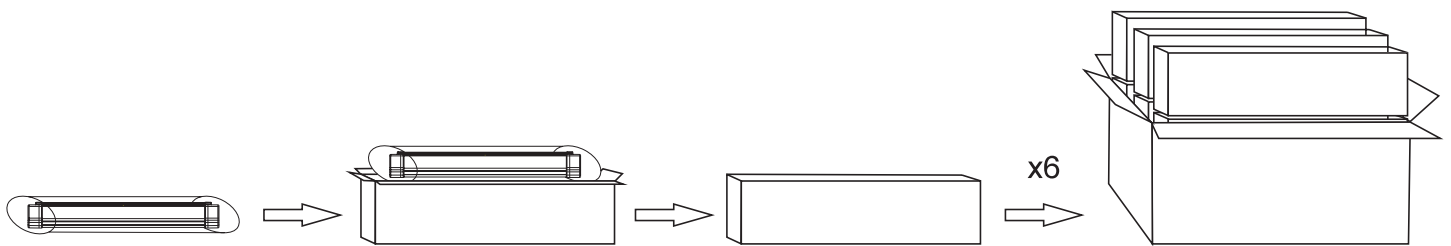




Installation Instructions


Install The Matters Needing Attention

1. Only professional electrician can install the lamp.
2. Check the lamp very carefully before installation.
3. Install the lamp follow up the installation procedure, make sure all parts safe.
4. Please request after service if trouble or doubt.

Ceiling style

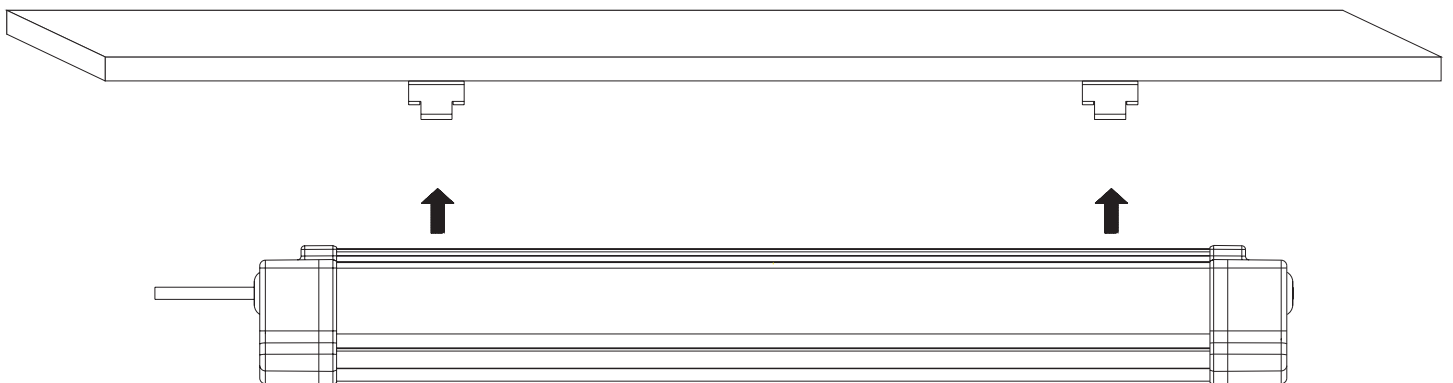

Pendant style

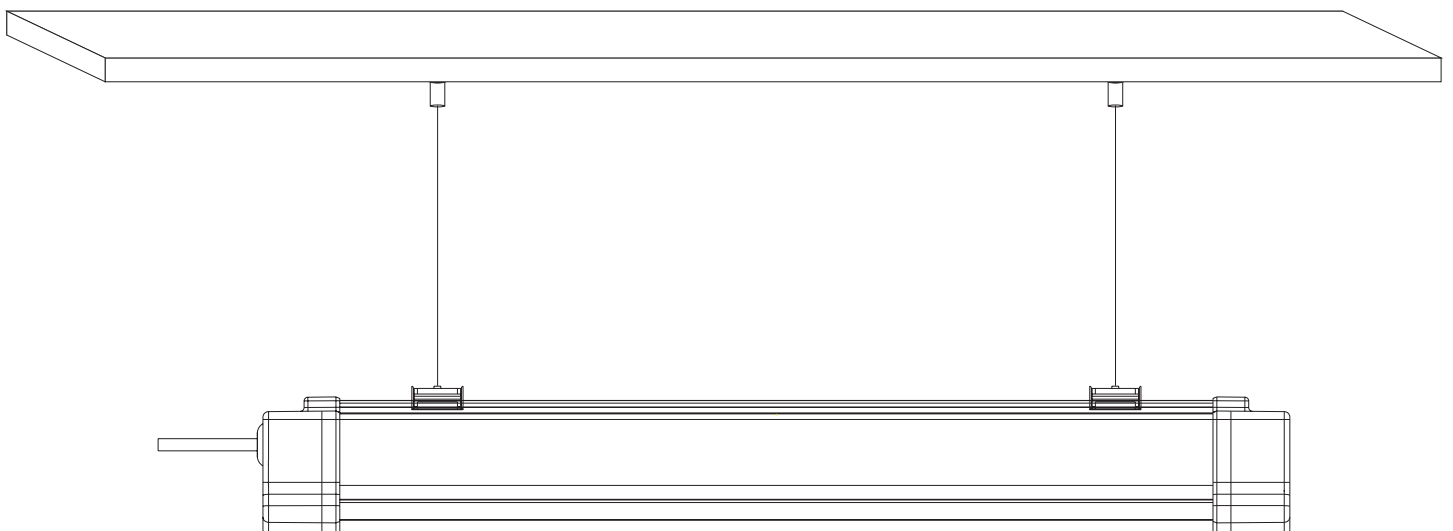



AC LIGHTING TECHNOLOGY LIMITED



Tri-proof IP65 LED
Line Lamps

Application Scenarios

1. Conference/Meeting rooms, Classrooms
2. Offices, Hospitals, Factories
3. Hotels, Offices or other Commercial Complexes
4. Residential/Institution Buildings
5. Places where energy saving and high color rendering index are needed



Contact us

AC Lighting Technology Limited

WEB: www.ac-ledlight.com

TEL: (+86) - 0755-28319552 FAX: (+86) - 0755-28319552

Email: info@ac-ledlight.com

**ADD:4F, Bldg C, Nanbugangtai xinglong Industrial
Park, Xixiang Town, Bao'an District, Shenzhen**

Guangdong Province, China, 518102