



NEW
PRODUCT




Design for replacement of philips tri-proof lamps





Products advantages:

1. Fully PC material.
2. 2835 SMD LEDs, Epistar LED chip, high brightness, lower light decay, safety working current to ensure long life span of LED. LM-80certified.
3. Specially AC power supply driver for LED lights, high power factor, suitable for global AC voltage. Products with overload protection, output short circuit protection, output overvoltage protection. Products with elegant appearance, smart and small size, high efficiency and low noise .With high isolation voltage driver to ensure safety use.
4. IP65 Waterproof, Explosion-proof, Dust-proof.

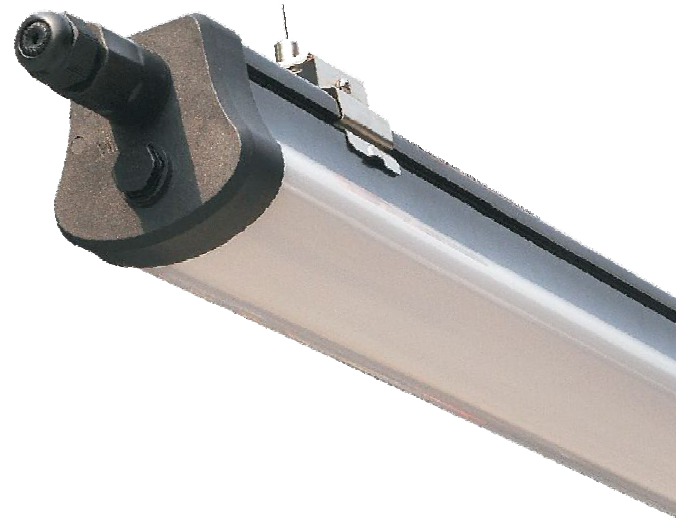

AC-LL60-20W-C-IP65

Description:

Model No.	AC-LL60-20W-C-IP65
Actual Size	600x78x75MM
LED Source	96pcs SMD2835
Power	20W
IP rate	IP65
Color Temp	Warm White:2800-3500K Natural White:4000-4500K Daylight White:5000-5500K Pure White:6000-6500K Cool White:6500-7000K
Luminous (lm)	1800-2000LM
Lighting effect	90LM/W
CRI	>80Ra
P.F	>0.9
Input Voltage	85-265VAC
Output Voltage	30-42VDC
Work Temp	-20~50 C
Main Material	PC
Frame color	Black/Silver/White
Lifespan	>35000Hrs
Warranty	3Years
Certification	CE ROHS FCC



AC-LL120-40W-C-IP65

Description:

Model No.	AC-LL120-40W-C-IP65
Actual Size	1200x78x75mm
LED Source	192pcs SMD2835
Power	40W
IP rate	IP65
Color Temp	Warm White:2800-3500K Netural White:4000-4500K Daylight White:5000-5500K Pure White:6000-6500K Cool White:6500-7000K
Luminous (lm)	3600-3800LM
Lighting effect	90LM/W
CRI	>80Ra
P.F	>0.9
Input Voltage	85-265VAC
Output Voltage	30-42VDC
Work Temp	-20~50 C
Main Material	PC
Frame color	Black/Silver/White
Lifespan	>35000Hrs
Warranty	3Years
Certification	CE ROHS FCC



AC-LL150-60W-C-IP65



Description:

Model No.	AC-LL150-60W-C-IP65
Actual Size	1500x78x75mm
LED Source	300pcs SMD2835
Power	60W
IP rate	IP65
Color Temp	Warm White:2800-3500K Netural White:4000-4500K Daylight White:5000-5500K Pure White:6000-6500K Cool White:6500-7000K
Luminous (lm)	5400-5600LM
Lighting effect	90LM/W
CRI	>80Ra
P.F	>0.9
Input Voltage	85-265VAC
Output Voltage	30-42VDC
Work Temp	-20~50 C
Main Material	PC
Frame color	Black/Silver/White
Lifespan	>35000Hrs
Warranty	3Years
Certification	CE ROHS FCC






Size:

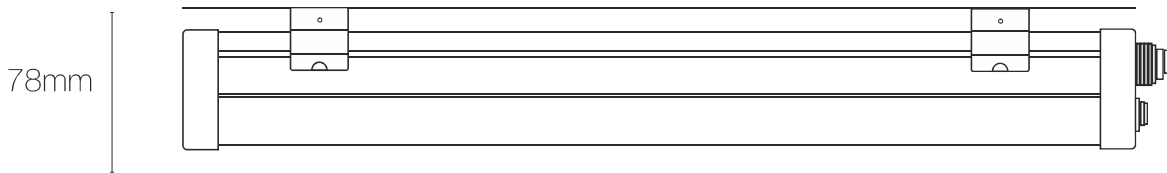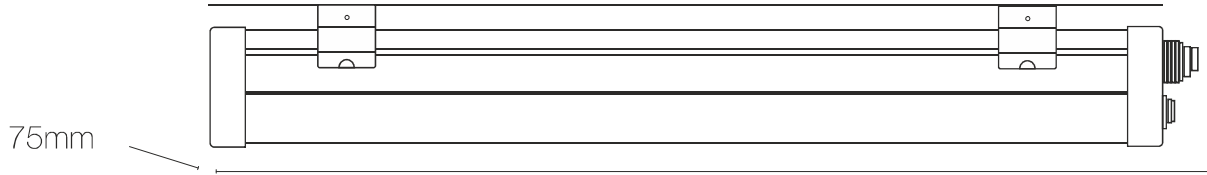

Package:

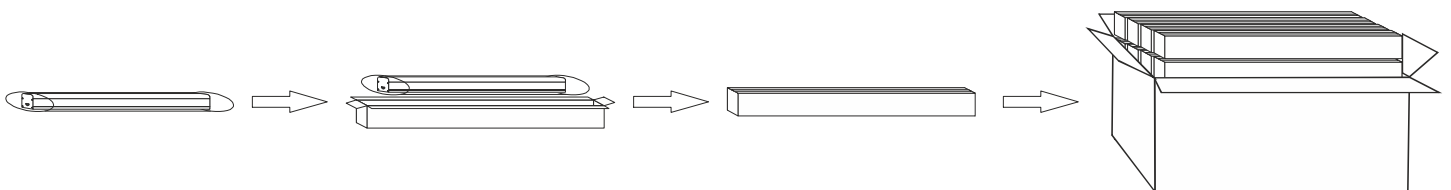

AC-LL60-20W-C-IP65
Outer Carton: 108*26*32cm

AC-LL120-40W-C-IP65
Outer Carton: 128*26*32cm

AC-LL150-60W-C-IP65
Outer Carton: 158*26*32cm




Installation Instructions


Install The Matters Needing Attention

1. Only professional electrician can install the lamp.
2. Check the lamp very carefully before installation.
3. Install the lamp follow up the installation procedure, make sure all parts safe.
4. Please request after service if trouble or doubt.

Ceiling style

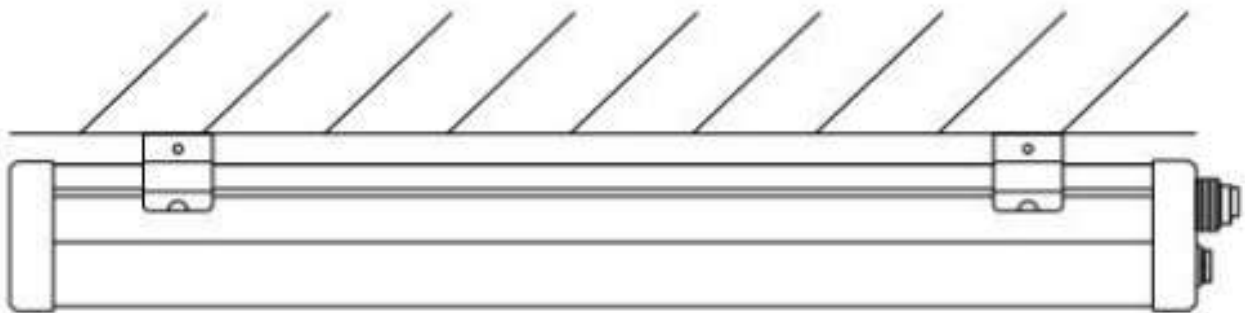

Pendant style

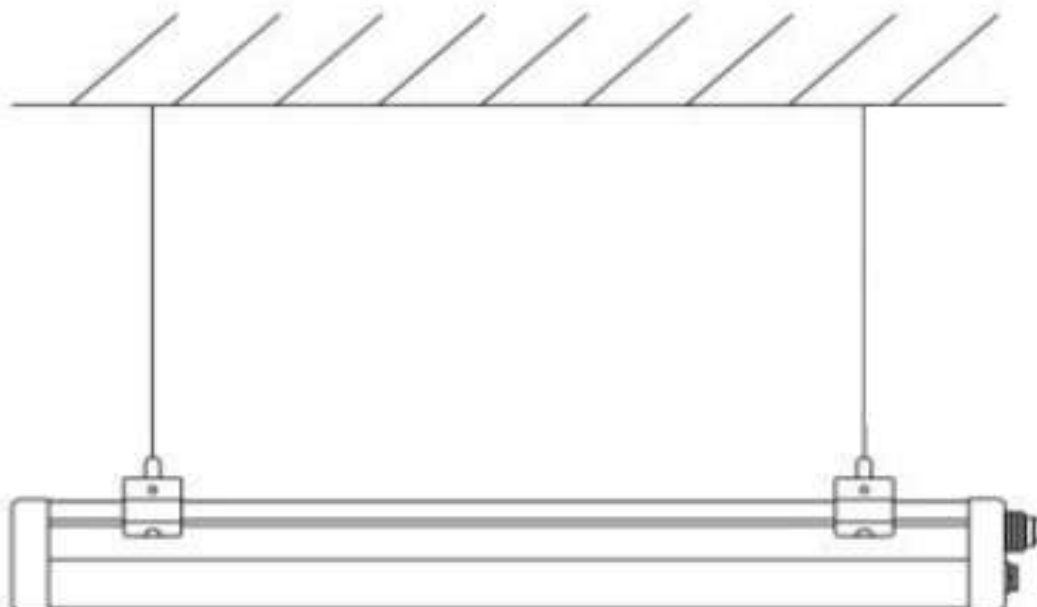



Application Scenarios

1. Conference/Meeting rooms, Classrooms
2. Offices, Hospitals, Factories
3. Hotels, Offices or other Commercial Complexes
4. Residential/Institution Buildings
5. Places where energy saving and high color rendering index are needed

